




PRO-VIT-09301001-001 VI TERMINAL INSTALL


1. Extract all from the Terminal Installer 1_1 compressed (zipped) Folder.

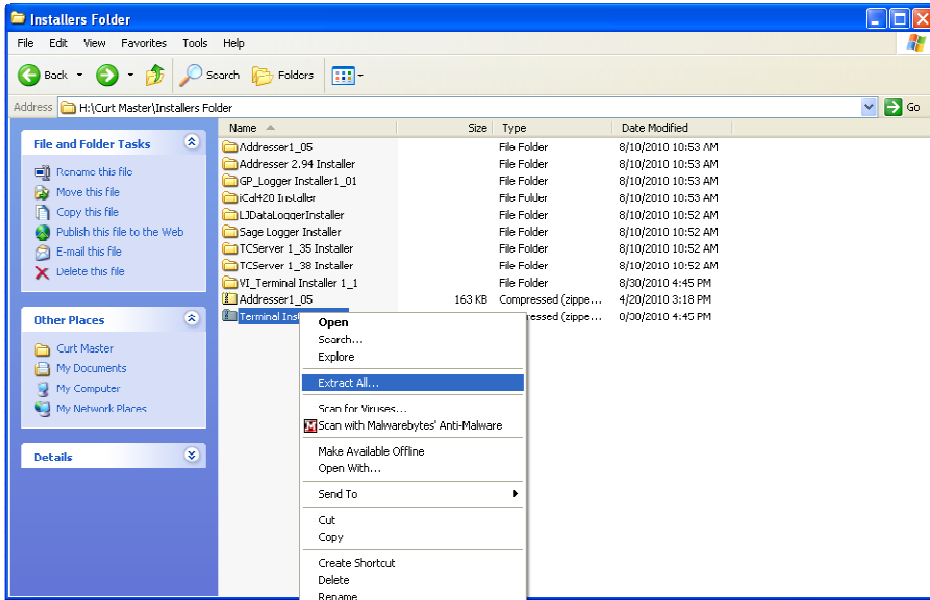

A.

- B. Open the folder subsequently created, Terminal Installer 1_1

- 1) Double click on the setup (application) icon

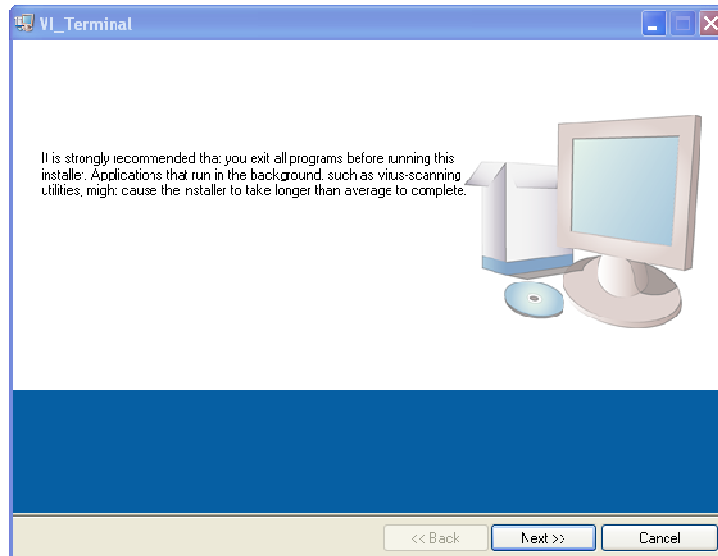


2)




PRO-VIT-09301001-001 VI TERMINAL INSTALL


3)

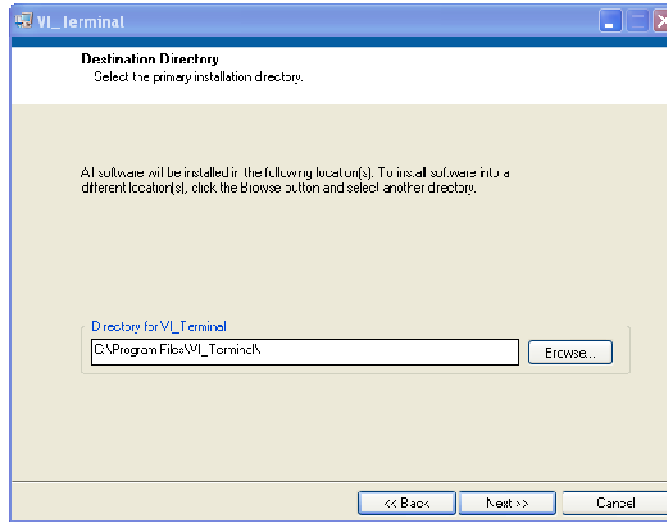

4)

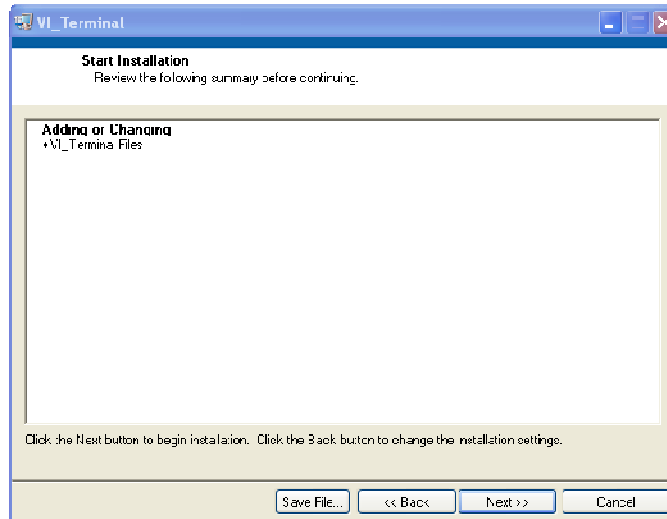

5)

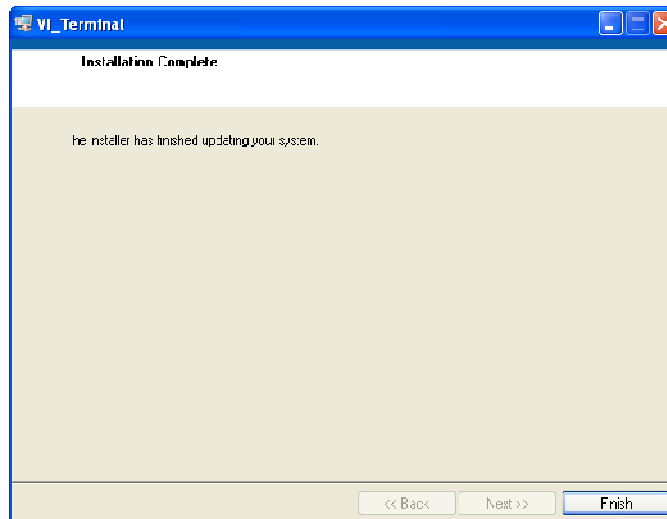


6) Click Finish




PRO-VIT-09301001-001 VI TERMINAL INSTALL

C. Attach the DB9 to serial port cable to your computer.


- 1) Determine which port # has been assigned to that cable
- 2) Right click on the My Computer icon, then select Manage

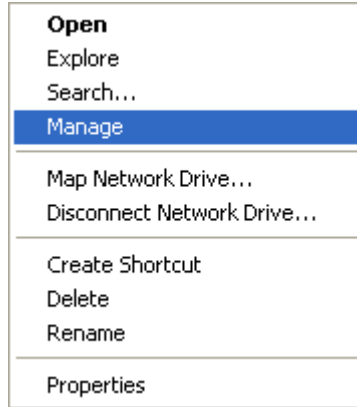

3)

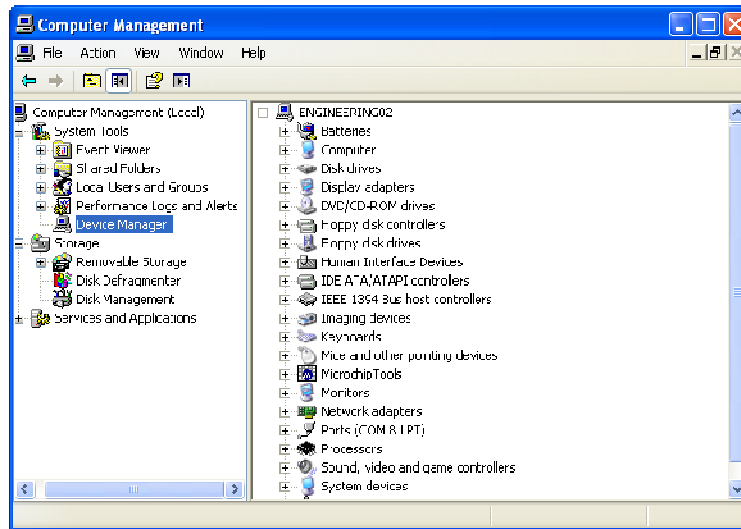

4)

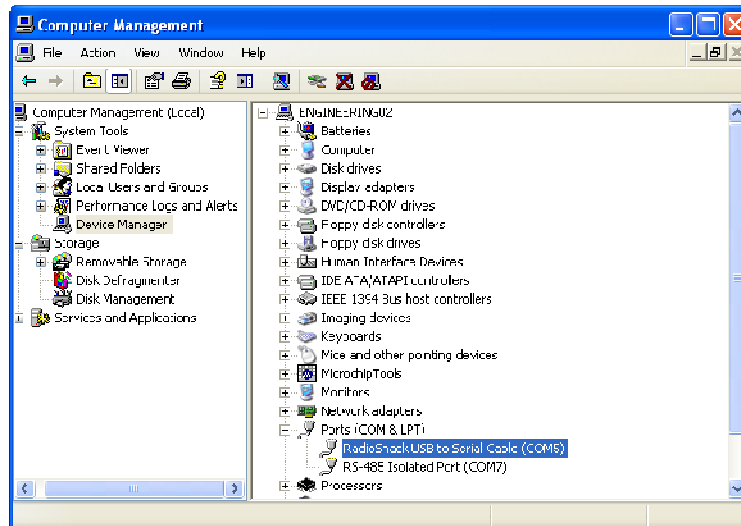


5)




PRO-VIT-09301001-001 VI TERMINAL INSTALL

- D. Go to the Program Files folder of your computer, scroll to and then open the VI_Terminal folder

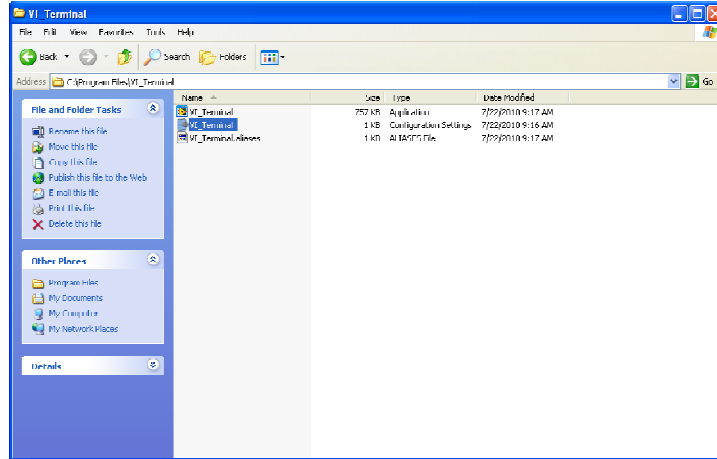


- 1)
- 2) Open the Configuration Settings file

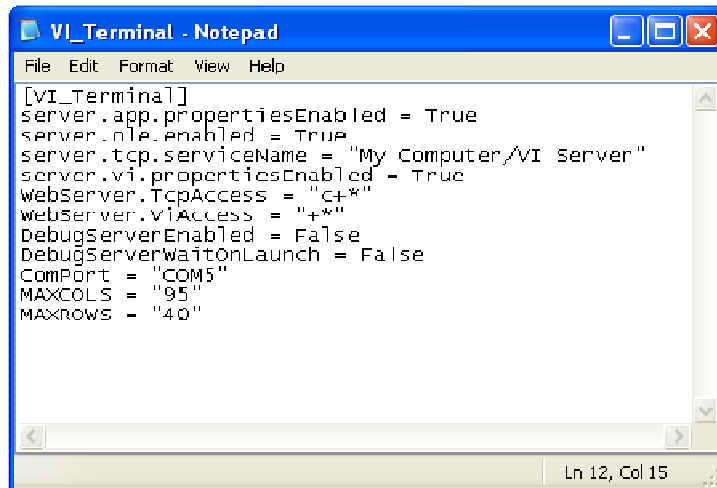


- 3)
- 4) Modify the ComPort = “Com?” statement to agree with the port you have identified. If there is no statement: ComPort = “Com5”, type it in, just as in this sample
- 5) Save this file, then exit.
- 6) Create a shortcut to the VI_Terminal application to put on your desktop if desired.



PRO-VIT-09301001-001 VI TERMINAL INSTALL

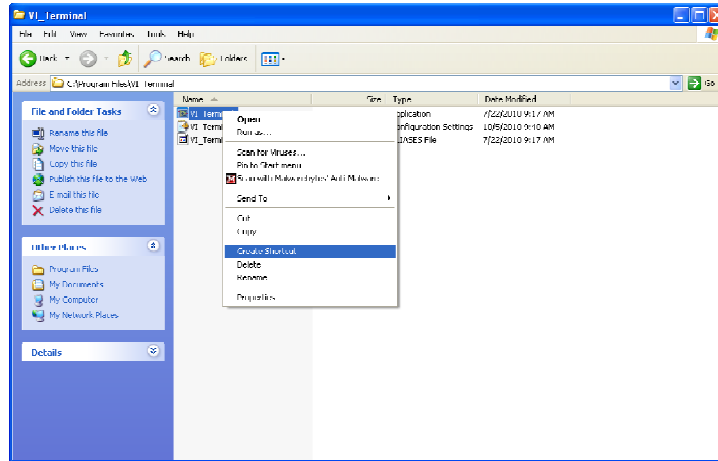

- 7)
- E. Open the VI Terminal application by double clicking on the app or shortcut icon
 - 1) If you are properly connected to the meter and are communicating with the right port, you will see:

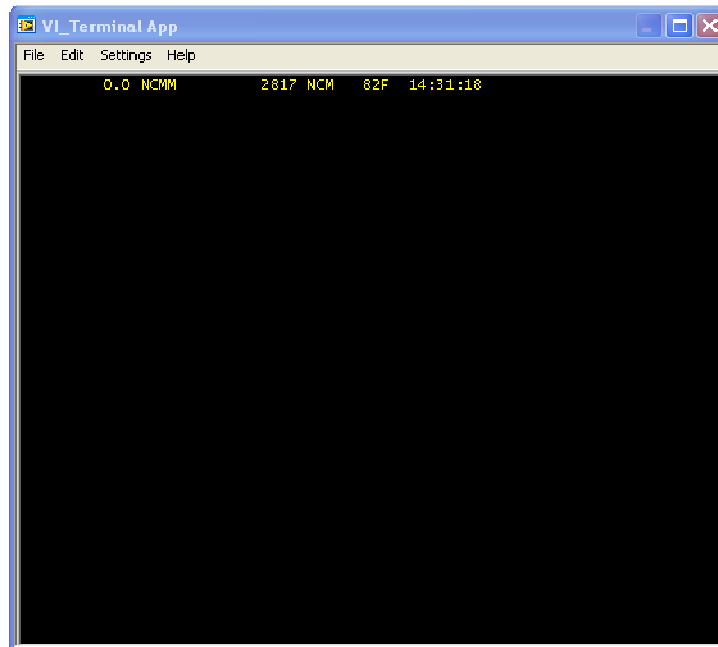

- 2)
- 3) Press the spacebar of your keyboard to get the menu



PRO-VIT-09301001-001 VI TERMINAL INSTALL

A screenshot of a Windows-style application window titled "VI_Terminal App". The window has a menu bar with "File", "Edit", "Settings", and "Help". The main content area is black with yellow text. At the top, it displays "0.0 NCMM 2817 NCM 81F 14:31:50". Below that, it shows "c2006, Sage Metering v2.066", "Chan A Locked, Ser#0, 10/05/10 14:31:50", and "Engineering Units = NCMM - NCM". A menu is listed with asterisks: "*MAIN MENU*", "100 *FLOW METER*", "200 *DISPLAY*", "300 *BASICS*", "400 *ENG'G UNITS*", "500 *ANALYSIS*", "600 *SENSOR DRIVER*", "620 *RELAYS*", and "700 *SYSTEM SETUP*". At the bottom, it prompts "Enter Passcode or Selection >".

```
0.0 NCMM 2817 NCM 81F 14:31:50
c2006, Sage Metering v2.066
Chan A Locked, Ser#0, 10/05/10 14:31:50
Engineering Units = NCMM - NCM

*MAIN MENU*
100 *FLOW METER*
200 *DISPLAY*
300 *BASICS*
400 *ENG'G UNITS*
500 *ANALYSIS*
600 *SENSOR DRIVER*
620 *RELAYS*
700 *SYSTEM SETUP*

Enter Passcode or Selection >
```

4)

5) Passcode 99999 must be entered to change any parameters.

F. Refer to the Operations Manual for details.