


SAGE PRIME ISOLATOR HART ENABLED 24VDC



Note: Sage Isolator Board provides isolated VDC for isolated 4-20 mA for HART Operation

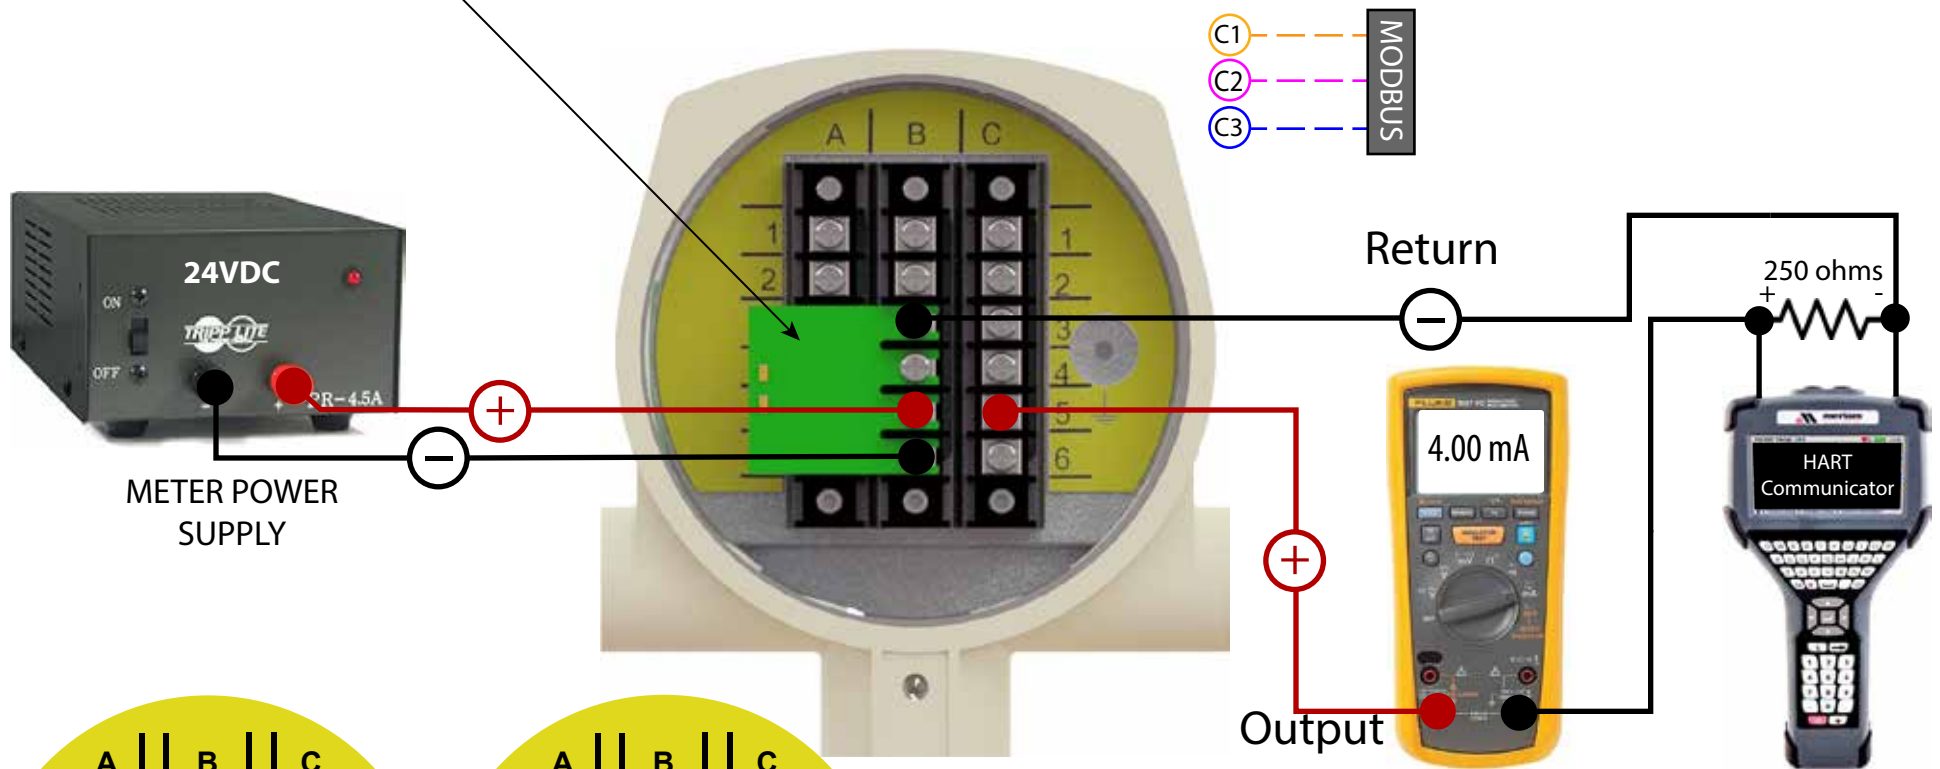

Torque all connections to 4.43 to 5.31 in-lbs (0.5 to 0.6Nm). Temperature rating of field installed conductors (75°C)

	A	B	C
RED	1		1 COMM
S1	2		2 B+
RED	3	ISOLATED GND	3 A-
WHITE	4	SOL	4
S2	5	VDC IN	5 4-20 mA +
WHITE	6	VDC GND	6

MODBUS
VDC 4-20mA
80-0115-RevB SRP, HART, DC, ISOLATED, INTERNALLY PROGRAMMED

INTEGRAL

Torque all connections to 4.43 to 5.31 in-lbs (0.5 to 0.6Nm). Temperature rating of field installed conductors (75°C)

	A	B	C
RED	1		1 COMM
GREEN	2		2 B+
BLUE	3	ISOLATED GND	3 A-
WHITE	4	SOL	4
BLACK	5	VDC IN	5 4-20 mA +
ORANGE	6	VDC GND	6

MODBUS
VDC 4-20mA
80-0117-RevB SRP, HART, DC, ISOLATED, INTERNALLY PROGRAMMED

REMOTE